

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 462 318 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**29.09.2004 Bulletin 2004/40**

(51) Int Cl.<sup>7</sup>: **B60R 21/01, B60R 22/185**

(21) Application number: **04075353.5**

(22) Date of filing: **03.02.2004**

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
HU IE IT LI LU MC NL PT RO SE SI SK TR**  
Designated Extension States:  
**AL LT LV MK**

(30) Priority: **14.02.2003 US 447489 P**  
**11.11.2003 US 705708**

(71) Applicant: **Delphi Technologies, Inc.**  
**Troy, MI 48007 (US)**

(72) Inventors:  
• **Hayden, Eric C.**  
**Cicero, IN 46034 (US)**

• **Fortune, Duane D.**  
**Lebanon, IN 46052 (US)**  
• **Rennaker, Royce L.**  
**Converse, IN 46919 (US)**  
• **Scales, Chance L.**  
**Kokomo, IN 46902 (US)**

(74) Representative: **Denton, Michael John**  
**Delphi European Headquarters,**  
**64 avenue de la Plaine de France,**  
**Paris Nord II,**  
**BP 60059,**  
**Tremblay-en-France**  
**95972 Roissy Charles de Gaulle Cédex (FR)**

(54) **Apparatus for measuring child seat anchor tension**

(57) A child seat anchor apparatus includes at least one sensor (30a, 30b; 52) for measuring tension exerted on a system including a pair of anchor brackets (24a, 24b) disposed between the bottom and back cushions (22, 28) of a vehicle seat (10). In a first mechanization, the anchor brackets (24a, 24b) are directly coupled to individual sensors (30a, 30b) mounted on an anchor frame (32) that is bolted to the seat frame (20). In a sec-

ond mechanization, the anchor brackets (24a, 24b) are fastened to an anchor frame (50) that is pivotably mounted on the seat frame (20), and the anchor frame (50) is additionally coupled to the seat frame (20) through a single sensor (52) responsive to the tension exerted on the anchor frame (50) by the anchor brackets (24a, 24b). (50) by the anchor brackets (24a, 24b). anchor bracket.

**EP 1 462 318 A1**

## Description

### Technical Field

[0001] The present invention relates to a child seat anchor system for a motor vehicle seat, and more particularly to apparatus for measuring the tension exerted on the anchor system.

### Background of the Invention

[0002] Vehicle occupant weight sensing systems are useful in connection with air bags and other pyrotechnically deployed restraints as a means of characterizing the occupant for purposes of determining whether to allow or suppress deployment of the restraints. In cases where an infant seat or child booster seat is placed on the seat cushion and cinched down with the seat belt, the presence of the infant or child seat can be detected based in part on a measure of the seat belt tension. However, in cases where the vehicle seat is equipped with a child seat anchoring system such as the LATCH (Lower Anchors and Tethers for Children) system, the infant or child seat can be secured using the seat anchors instead of the seat belt. Since tension applied to such child seat anchors produces an effect similar to that which occurs when the child seat is secured with the seat belt, it is desired to measure the tension exerted on such a child seat anchoring system.

### Summary of the Invention

[0003] The present invention is directed to apparatus for measuring the tension exerted on a child seat anchoring system including a pair of anchor brackets disposed between the bottom and back cushions of a vehicle seat. In a first embodiment, the anchor brackets are directly coupled to individual tension sensors mounted on an anchor frame that is bolted to the seat frame supporting the bottom cushion of the seat. In a second embodiment, the anchor brackets are fastened to an anchor frame that is pivotably mounted on the seat frame, and the anchor frame is additionally coupled to the seat frame through a single strain sensor responsive to the tension exerted on the anchor frame by the anchor brackets.

### Brief Description of the Drawings

[0004] The present invention will now be described, by way of example, with reference to the accompanying drawings, in which:-

Figure 1 is a diagram of a vehicle seat including an occupant weight estimation apparatus and a child seat anchor tension measurement apparatus according to a first embodiment of this invention.  
Figure 2 is a rear view of the anchor tension meas-

urement apparatus of Figure 1.

Figure 3 is a partial diagram of a vehicle seat equipped with a child seat anchor tension measurement apparatus according to a second embodiment of this invention.

Figure 4 is rear view of the anchor tension measurement apparatus of Figure 3.

### Description of the Preferred Embodiment

[0005] Referring to Figures 1-2, the present invention is disclosed in the context of a vehicle passenger seat 10 equipped with a fluid-filled seat cushion bladder 12 for estimating the weight of a seat occupant based on the fluid pressure in the bladder 12. An exit port of the bladder 12 is coupled to a pressure sensor 14 by a tube 16, and the pressure sensor output is supplied to a passenger occupant detection system electronic control unit (PODS ECU) 18, which determines if deployment of supplemental restraints for the occupant of seat 10 should be enabled or disabled. In general, however, the present invention also applies to other types of occupant weight sensing systems, such as systems that sense the strain in seat frame 20, or systems that include a network of pressure sensitive cells distributed over the seating area of bottom cushion 22.

[0006] The seat 10 is equipped with a pair of child seat anchor brackets 24a, 24b for securely fastening an infant or child booster seat 26 to the seat 10 via the tethers 26a (only one of which is depicted in Figure 1). The anchor brackets 24a, 24b are located near the left and right rear corners of the cushion 22, and the outboard end of each bracket 24a, 24b is disposed in a gap between the cushions 22 and 28 as shown.

[0007] In general, the present invention is directed to an apparatus including at least one tension or strain sensor coupled to an anchor frame for measuring the tension exerted on the anchor brackets 24a, 24b. Figures 1-2 depict a first embodiment where the anchor brackets 24a, 24b are directly coupled to individual tension sensors 30a, 30b mounted on an anchor frame 32 that is bolted to the seat frame 20. Figures 3-4 depict a second embodiment of this invention where the anchor brackets 24a, 24b are fastened to an anchor frame 50 that is pivotably mounted on the seat frame 20, and a single strain sensor 52 coupled between the seat frame 20 and the anchor frame 50 measures the force applied to the anchor frame 50 by the anchor brackets 24a, 24b. The strain sensors 30a, 30b, 52 may be constructed as disclosed, for example, in the U.S. Patent No. 6,605,877, issued on August 12, 2003 and incorporated herein by reference.

[0008] Referring to the embodiment of Figures 1-2, the anchor frame 32 is contoured to form right and left pocket areas 34a, 34b at the leading edges thereof, and the tension sensors 30a, 30b are bolted into the respective pocket areas. The anchor frame 32, in turn, is bolted to the seat frame 20 via the apertures 36a, 36b. If de-

sired, the anchor frame 32 can be configured so that the sensors 30a, 30b are essentially aligned with the child seat tethers 26a, in which case the anchor brackets 24a, 24b will be straight instead of angled. The anchor frame 32 may be stamped sheet metal, for example, and surface contours 38 may be included to provide increased stiffness. The tension sensors 30a, 30b develop electrical signals corresponding to the tension exerted on the anchor brackets 24a, 24b, respectively, and such signals are provided to PODS ECU 18 via lines 40a, 40b. In cases where the child seat tethers 26a are formed with a single strip of material passing through the seat 26, one of the anchor brackets 24a, 24b can be welded directly to the anchor frame 32 as shown in Figures 3-4, and the single tension sensor 30a or 30b will provide an adequate measure of the combined tension applied to the anchor brackets 24a, 24b. The PODS ECU 18 utilizes the anchor tension signals to detect the presence of an infant or child seat 26, and also to compensate the occupant seat weight indication (the pressure signal output of pressure sensor 14, for example) or a threshold to which the occupant seat weight indication is compared.

[0009] Referring to the embodiment of Figures 3-4, anchor frame 50 is contoured to form right and left pocket areas 50a, 50b at the leading edges thereof, and the anchor brackets 24a, 24b are welded into the respective pocket areas. As with the anchor frame 32, the anchor frame 50 may be stamped sheet metal, for example, and include surface contours 56 to provide increased stiffness. The lower sides of anchor frame 50 are flanged as indicated by the reference numerals 58, each flange 58 having a mounting aperture 60 as shown in Figure 3. A rod 62 (or two individual posts) securely fastened to the seat frame 20 passes through the apertures 60 to pivotally support the anchor frame 50 with respect to the seat frame 20. The anchor frame 50 is additionally coupled to the seat frame 20 by the tension sensor 52 so that tension applied to the anchor brackets 24a, 24b produces a corresponding force that is measured by the sensor 52. Referring to Figure 3, a mounting tab 66 formed at one end of sensor 52 is fastened to seat frame 20, and a rod 68 formed at the other end of sensor 52 is secured to the anchor frame 50. In the illustrated embodiment, the rod 68 terminates in a cross-piece 68a that is captured by a pair of oppositely depending tabs 70a, 70b formed in anchor frame 50. Tension applied to the anchor brackets 24a, 24b tends to rotate the anchor frame 50 toward the infant seat 26 about the rod 62, and the resulting force measured by sensor 52 provides a measure of the total tension. As with the embodiment of Figures 1-2, the output of tension sensor 52 is provided to PODS ECU 18, which utilizes the anchor tension signals to detect the presence of an infant or child seat 26, and to compensate the occupant seat weight indication or a threshold to which the occupant seat weight indication is compared.

[0010] In summary, the present invention provides a

reliable and cost-effective apparatus for measuring the tension exerted on a pair of child seat anchor brackets in a vehicle seat. While the invention has been described in reference to the illustrated embodiments, it should be understood that various modifications in addition to those mentioned above will occur to persons skilled in the art. For example, the strain sensors 30a, 30b, 52 may be replaced with suitably mounted strain gauges, and so on. Accordingly, it will be understood that anchor tension measurement devices incorporating these and other modifications may fall within the scope of this invention, which is defined by the appended claims.

## Claims

1. Apparatus for measuring tension exerted on a child seat anchor bracket (24a, 24b) of a vehicle seat (10), comprising:
  - an anchor frame (32; 50) coupled to the anchor bracket (24a, 24b), and secured to a frame (20) of the vehicle seat (10); and
  - a tension or strain sensor (30a, 30b; 52) coupled to the anchor frame (32; 50).
2. The apparatus of Claim 1, wherein said sensor (30a, 30b) includes a first portion rigidly secured to said anchor frame (50) and a second portion integral with said anchor bracket (24a, 24b).
3. The apparatus of Claim 1, wherein said anchor bracket (24a, 24b) is rigidly secured to said anchor frame (50) and said sensor (52) includes a first portion (68) coupled to said anchor frame (50) and a second portion (66) coupled to the seat frame (20).
4. The apparatus of Claim 3, wherein said anchor frame (50) is secured to the seat frame (20) by a pivot coupling (60, 62), and said sensor (52) is coupled to said anchor frame (50) between said pivot joint (60, 62) and said anchor bracket (24a, 24b).

Fig.1.




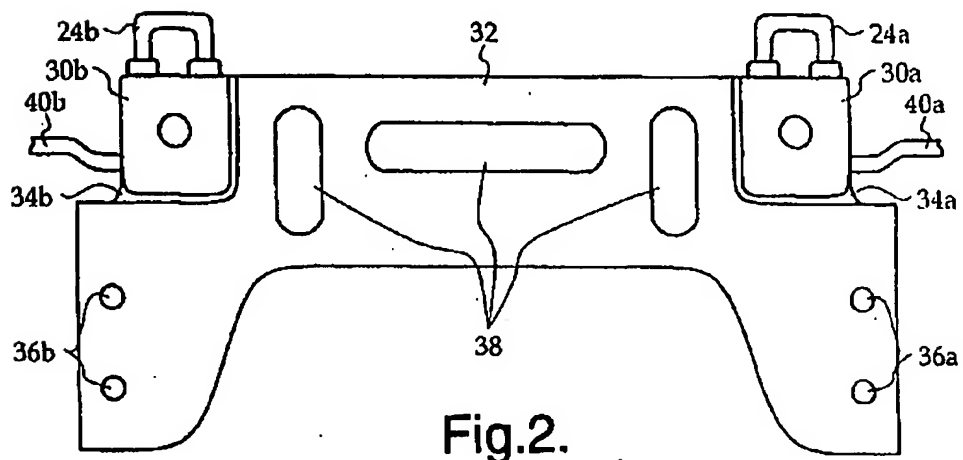


Fig.2.

**Fig.3.**



**Fig.4.**

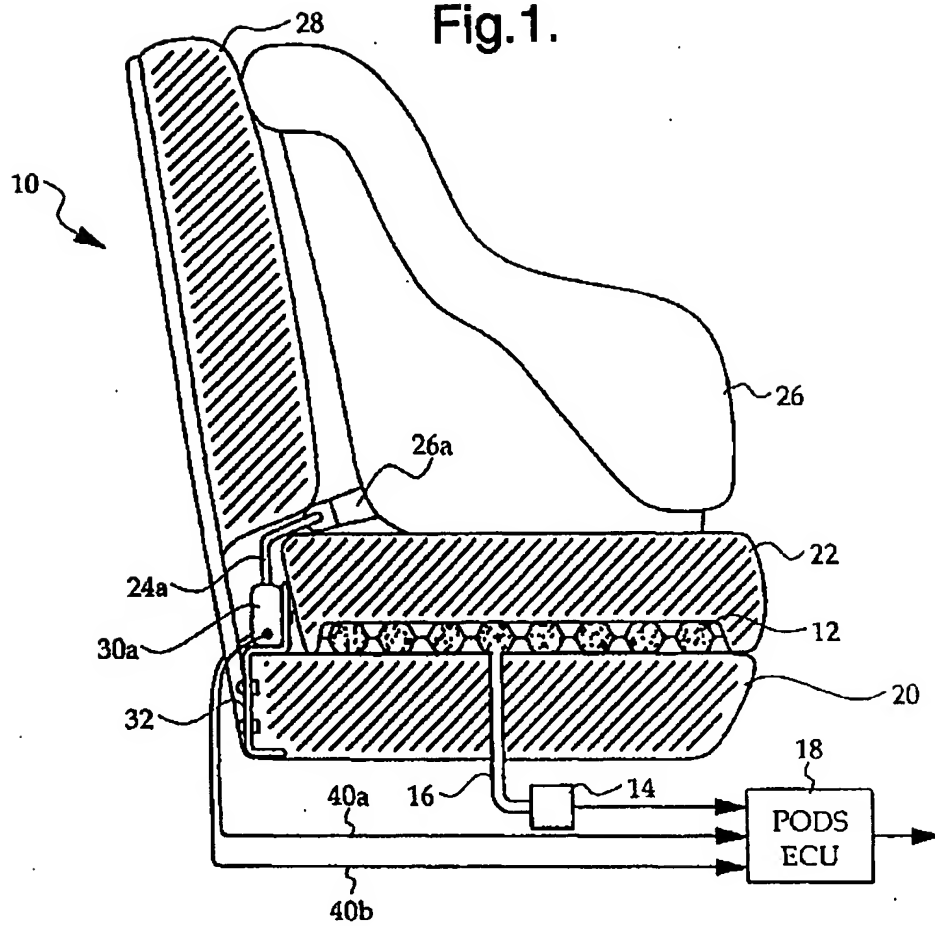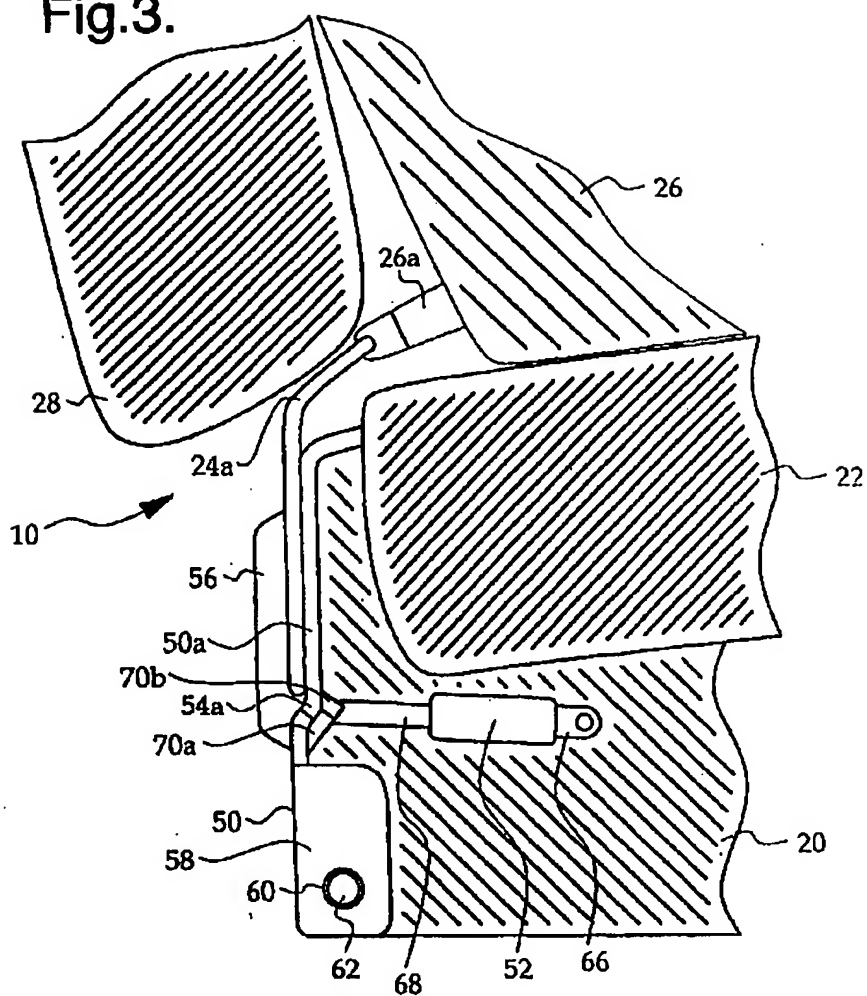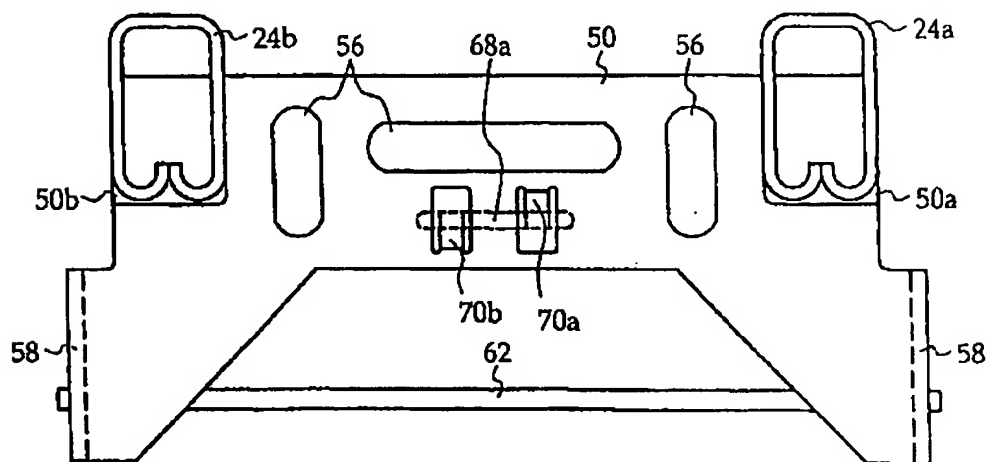



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 04 07 5353

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 2002/171234 A1 (SCHONDORF STEVEN YELLIN ET AL) 21 November 2002 (2002-11-21) * paragraph [0024] - paragraph [0026]; figures 1,4,5 *	1,2	B60R21/01 B60R22/185
X	US 2002/038573 A1 (CLARK JEFFREY ALLEN) 4 April 2002 (2002-04-04) * paragraph [0022] - paragraph [0027]; figures 1-4 *	1,2	
X	US 5 996 421 A (HUSBY HARALD SNORRE) 7 December 1999 (1999-12-07) * column 3, line 28 - line 62; figures 1,5,6 *	1	
X	WO 01/87676 A (SIEMENS AUTOMOTIVE CORP LP) 22 November 2001 (2001-11-22) * page 5, line 11 - line 25; figures 3-5 * * page 6, line 31 - page 7, line 7; figure 10 *	1	
Y	US 6 301 977 B1 (STOJANOVSKI STOJAN) 16 October 2001 (2001-10-16) * column 2, line 51 - column 4, line 34; figures 2-5,7,10 *	2	TECHNICAL FIELDS SEARCHED (Int.Cl.7) B60R
Y	US 2001/042981 A1 (KOHUT GEORGE RODNEY ET AL) 22 November 2001 (2001-11-22) * abstract *	2	
A	US 2002/024257 A1 (FUJIMOTO OSAMU ET AL) 28 February 2002 (2002-02-28) * paragraph [0041] - paragraph [0051]; figures 2-4 *	1	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 3 August 2004	Examiner Cipriano, P
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention B : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 04 07 5353

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-08-2004

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2002171234 A1	21-11-2002	DE 10152770 A1	16-05-2002
		GB 2371667 A ,B	31-07-2002
US 2002038573 A1	04-04-2002	EP 1330379 A2	30-07-2003
		WO 0228692 A2	11-04-2002
US 5996421 A	07-12-1999	WO 9955559 A1	04-11-1999
WO 0187676 A	22-11-2001	EP 1280683 A2	05-02-2003
		JP 2003533399 T	11-11-2003
		WO 0187676 A2	22-11-2001
		US 2004025601 A1	12-02-2004
		US 2001052696 A1	20-12-2001
US 6301977 B1	16-10-2001	NONE	
US 2001042981 A1	22-11-2001	US 6502860 B1	07-01-2003
		WO 0206092 A1	24-01-2002
		WO 0240317 A2	23-05-2002
		US 2002056975 A1	16-05-2002
US 2002024257 A1	28-02-2002	JP 2001191830 A	17-07-2001

EPO FORM P0480

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82